

FPZ
BLOWER TECHNOLOGY

SCL 06-MS MOR


VERSION EU

TECHNICAL CHARACTERISTICS

- Aluminium alloy construction
- High efficiency impeller

OPTIONS

- Special Voltages (IEC 60038)
- Surface treatments
- Increased seal version

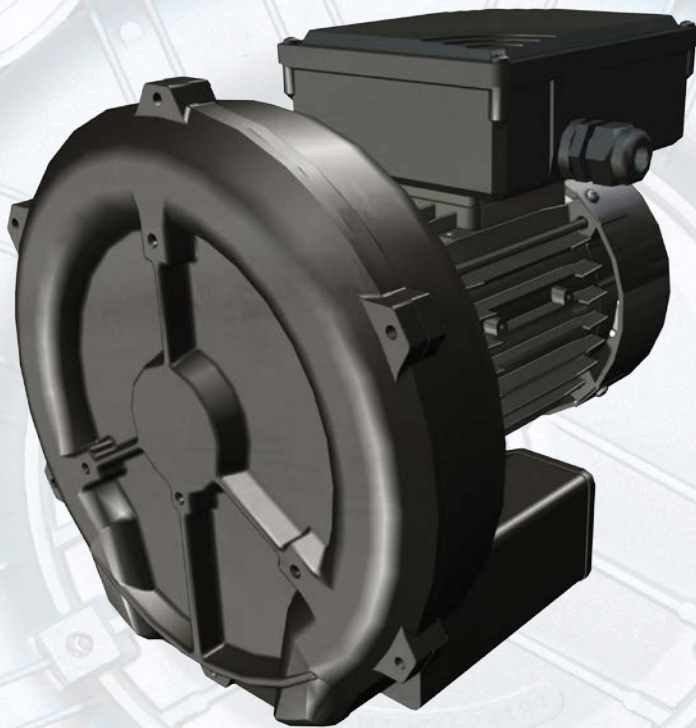

Data sheet

LATERAL CHANNEL BLOWERS-EXHAUSTERS

COMPANY WITH QUALITY MANAGEMENT
SYSTEM CERTIFIED BY DNV
= ISO 9001:2008 =



PRESSURE

Model	N 2900 rpm [kW]	N 3500 rpm [kW]	Q max 2900 rpm [m ³ /h]	Q max 3500 rpm [m ³ /h]	ΔP max 2900 rpm [hPa](mbar)	ΔP max 3500 rpm [hPa](mbar)	Leq ¹ 2900 rpm (Lp) [dB(A)]	Leq ¹ 3500 rpm (Lp) [dB(A)]	Weight ² max [kg]
06-MS	0,2	0,23	55	66	90	80	58	58,7	6,5
	-	0,4	55	66	-	130	-	59	7,1

VACUUM

Model	N 2900 rpm [kW]	N 3500 rpm [kW]	Q max 2900 rpm [m ³ /h]	Q max 3500 rpm [m ³ /h]	ΔP max 2900 rpm [hPa](mbar)	ΔP max 3500 rpm [hPa](mbar)	Leq ¹ 2900 rpm (Lp) [dB(A)]	Leq ¹ 3500 rpm (Lp) [dB(A)]	Weight ² max [kg]
06-MS	0,2	0,23	55	66	82	80	58	58,7	6,5
	-	0,4	55	66	-	120	-	59	7,1

INSTALLATION

- For proper use, the blower should be equipped with INLET FILTER and Flow Relief VALVE; other accessories available on request.
- Ambient temperature from -15° to +40°C (+5° to +104° F).
- Specifications subject to change without notice.
- Before installation read carefully all instructions.

¹ Noise measured at 1 m distance with inlet and outlet ports piped, in accordance to ISO 3744.

² Value refers to the weight of the machine with 3 Phase motor if MOR range, without motor if GOR or GVR range.

N: Installed motor power


Q: Flow rate

ΔP : Differential pressure


Leq: Noise level

PRESSURE



2900 rpm (50 Hz)

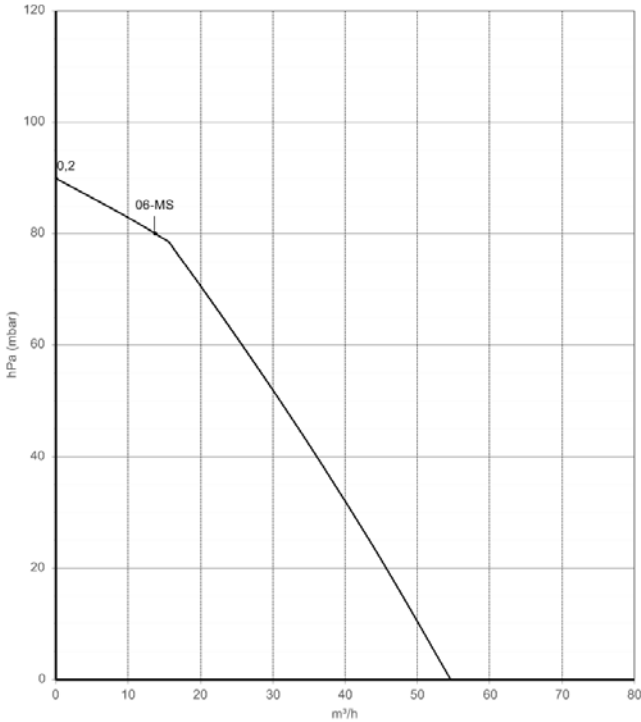



3500 rpm (60 Hz)

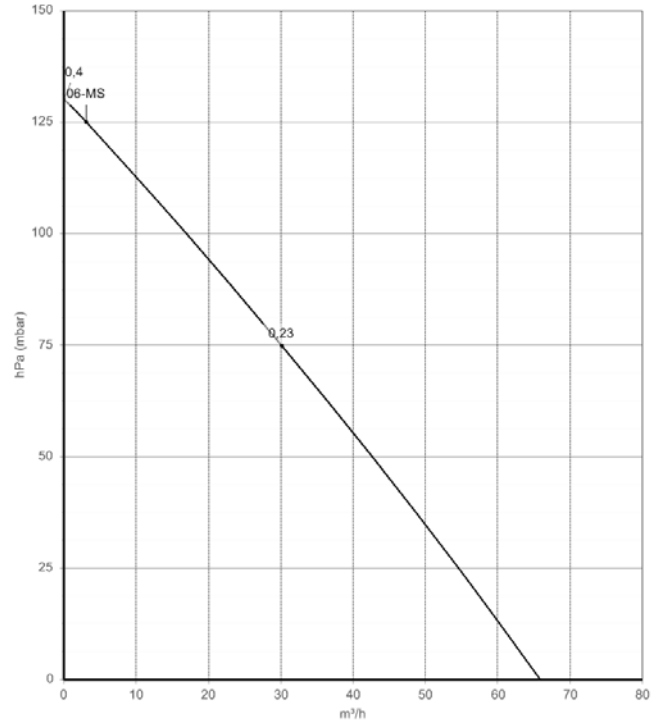

FLOW RATE

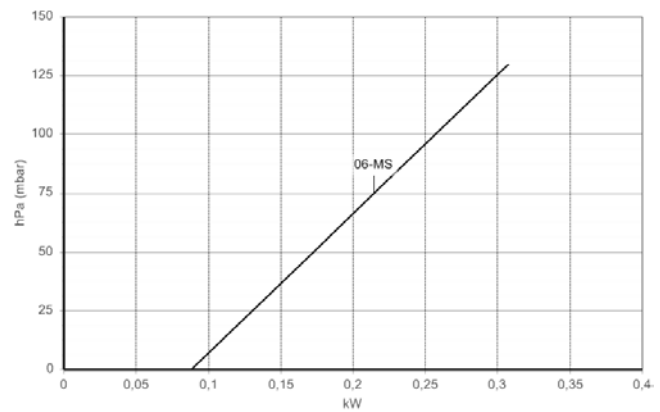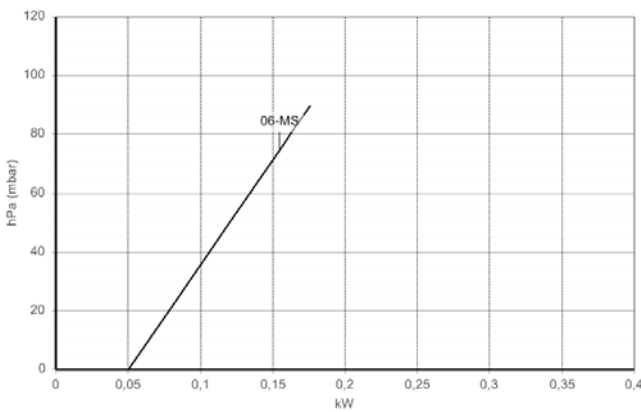

ABSORBED POWER

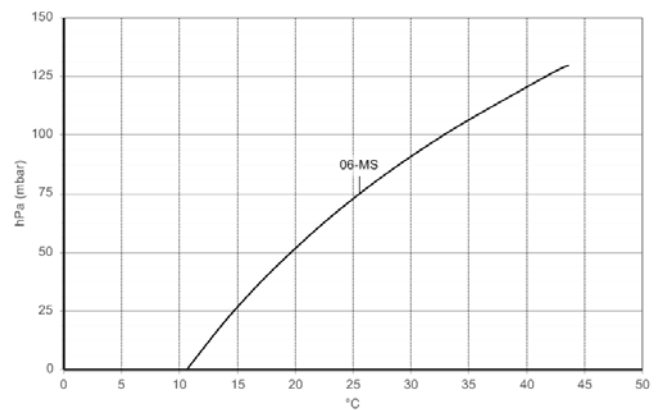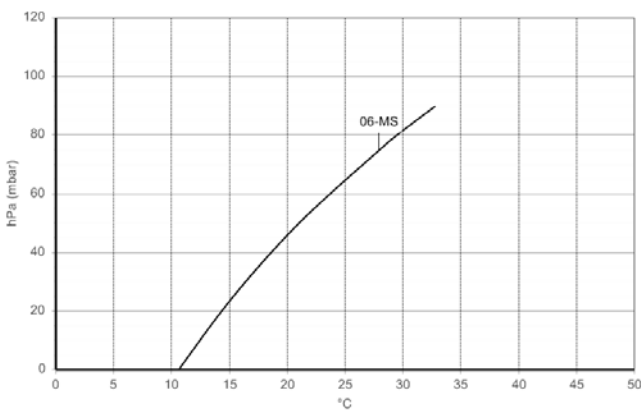



TEMPERATURE INCREASE

Curves refer to air at 20°C (68° F) temperature and 1013 mbar (29.92 In Hg) atmospheric pressure (abs) measured at inlet port.
Values for flow, power consumption and temperature rise: ±10% tolerance.
Data can change without prior notice.



VACUUM

2900 rpm (50 Hz)



3500 rpm (60 Hz)

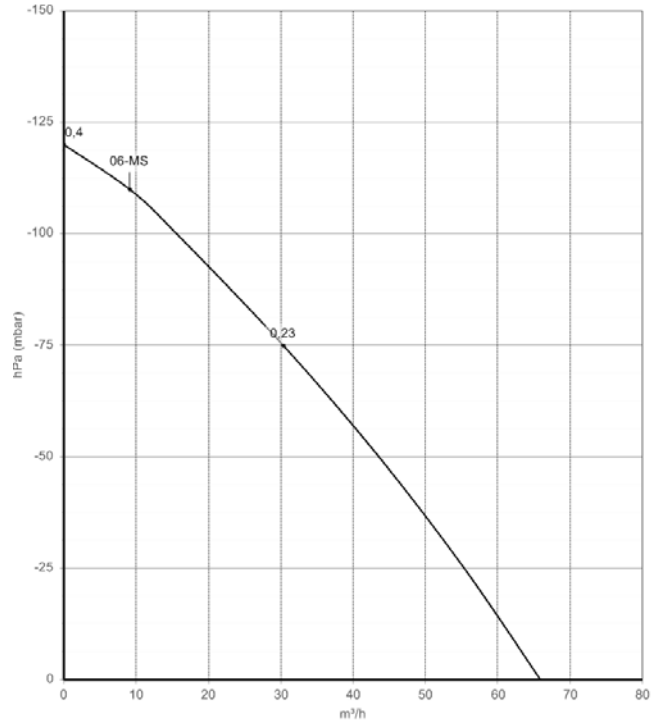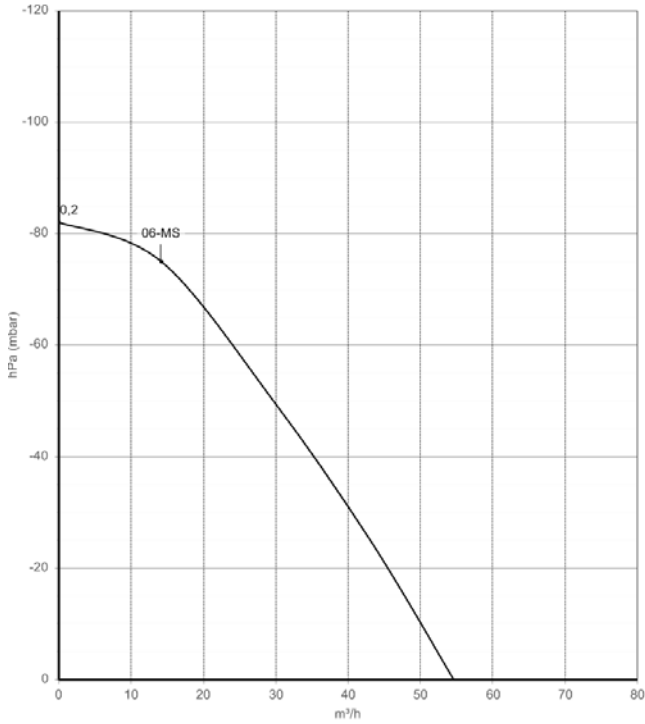

FLOW RATE

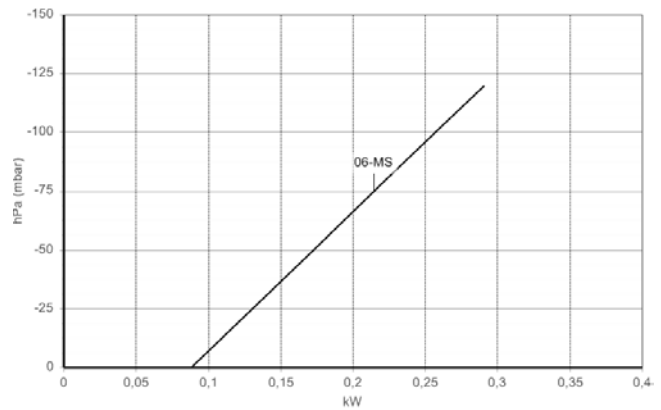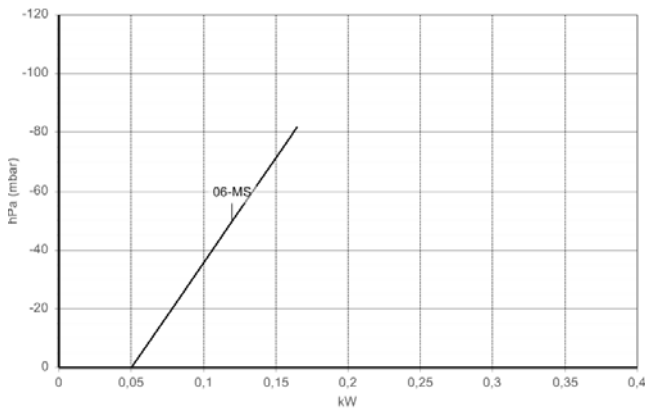


ABSORBED POWER

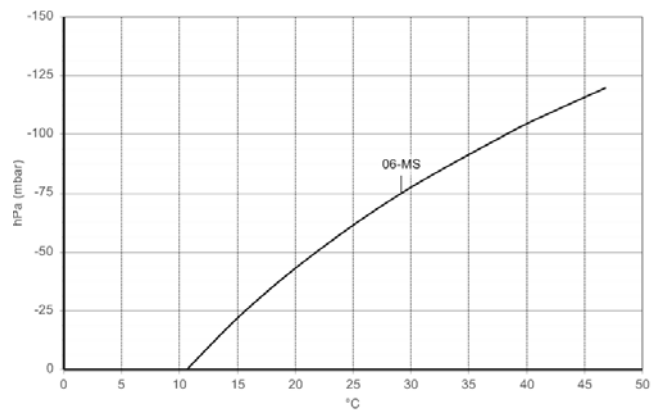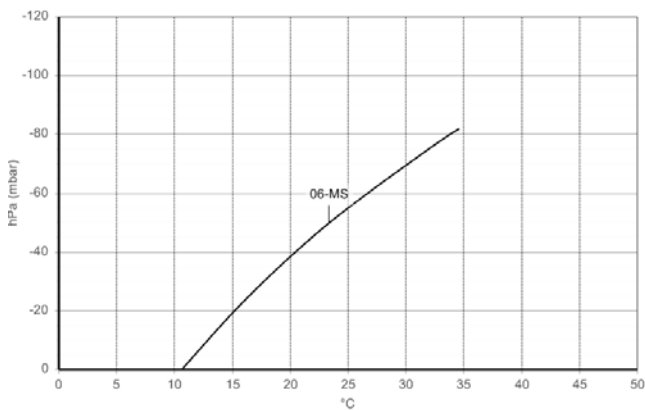

TEMPERATURE INCREASE

Curves refer to air at 20°C (68° F) temperature, measured at inlet port and 1013 mbar (29.92 In Hg) atmospheric backpressure (abs).
 Values for flow, power consumption and temperature rise: ± 10% tolerance.
 Data can change without prior notice.

DIMENSIONS (06)

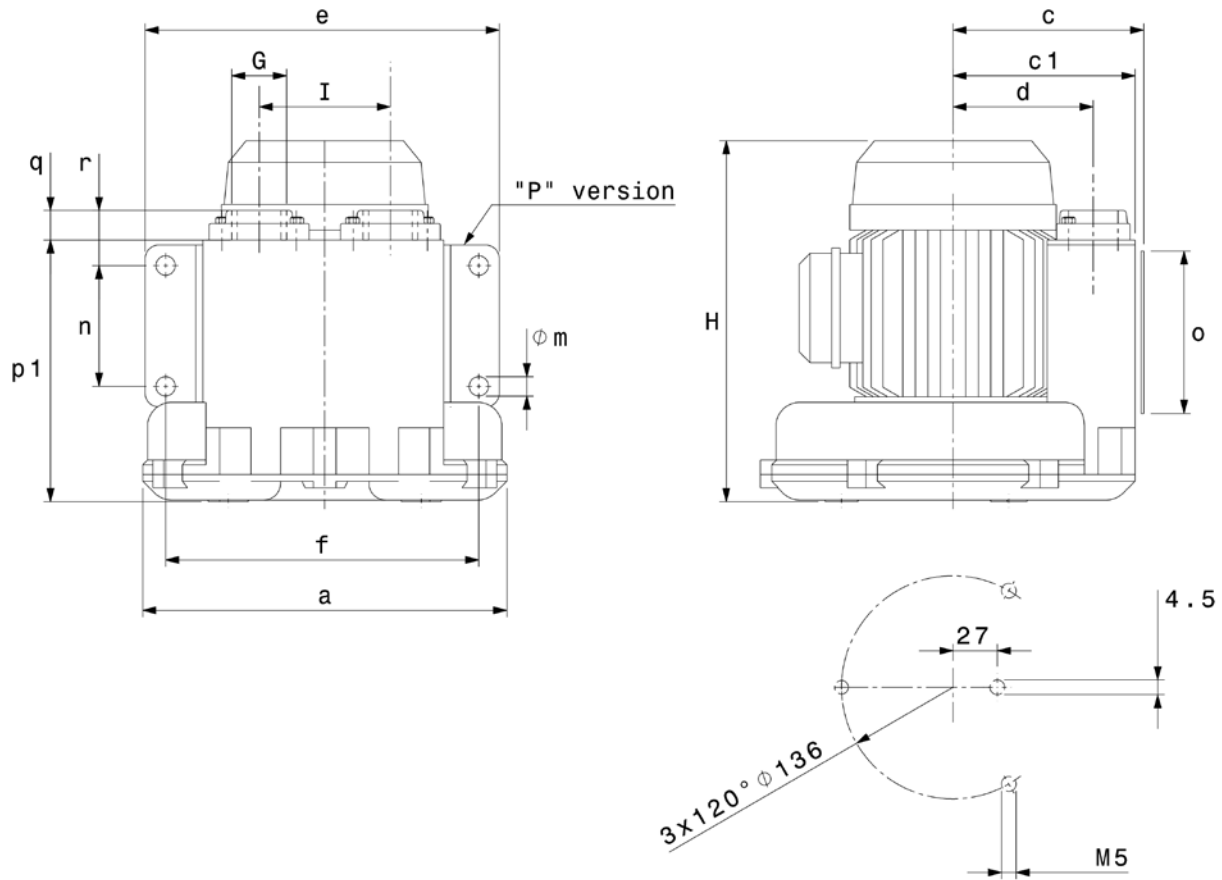


Dimensions in mm - FOR REFERENCE ONLY

Model	a	c	c1	d	e	f
06-MS	222	116	111	86	220	195

Model	f1	f2	H	i	m
06-MS	1"	235	235	80	11

Model	n	o	p1	q	r
06-MS	75	105	160	15	35



FPZ
BLOWER TECHNOLOGY

FPZ, Inc
Saukville, Wisconsin
USA
usa@fpz.com

FPZ México/LA
Zapopan, Jalisco
México
mexico@fpz.com

FPZ Espana & Portugal
Barcelona
Espana
mila.lozano@fpz.com

FPZ France S.a.r.l.
St. Priest
France
france@fpz.com

FPZ UK
Andover, Hampshire
United Kingdom
uk@fpz.com

HEADQUARTERS
FPZ S.p.A.
Concorezzo (MB)
Italy
info@fpz.com

FPZ Austria & Germany
Krems
Austria
vertrieb@fpz.com